


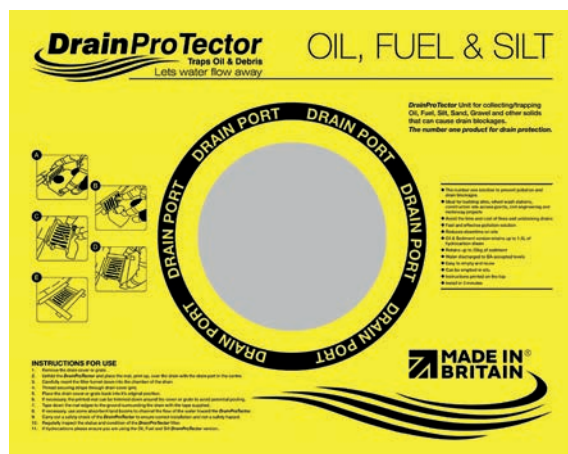

Oil, Fuel & Silt DrainProTector

750 x 600mm

Product Code: **SE00878**

Pack Quantity: **1**

fast, effective solution for preventing pollution and drain blockages on site. Designed for rapid installation in just 3 minutes, it captures up to 22kg of sediment while allowing water to be discharged to Environment Agency-accepted levels. Easy to empty and reuse, it can be maintained in situ to minimise downtime, helping organisations avoid the costs, disruption and potential fines.

KEY FEATURES

- The number 1 solution to prevent pollution & drain blockages
- Ideal for building sites, wheel wash stations, construction access points, civil engineering & motorway projects
- Avoid the time & cost of fines
- Fast & effective pollution solution
- Reduces downtime on site
- Retains up to 1.5L of hydrocarbon sheen
- Retains up to 22kg of sediment
- Water discharged to EA-accepted levels
- Easy to empty & reuse
- Can be emptied in situ
- Instructions printed on the top
- Install in 3 minutes

SPECIFICATION

Size:	750 x 600mm
Drain Port Diameter:	250mm
Capacity:	22kg

INSTRUCTIONS FOR USE

- Remove the drain cover or grate
- Unfold the **DrainProTector** and place the mat print up, over the drain with the drain port in the centre
- Carefully insert the filter funnel down into the chamber of the drain
- Thread securing straps through drain cover grid
- Place the drain cover or grate back into it's original position
- If necessary, the printed mat can be trimmed down around the cover or grate to avoid potential pooling
- Tape down the mat edges to the ground surrounding the drain with the tape supplied
- If necessary, use some absorbent land booms to channel the flow of the water toward the **DrainProTector**
- Carry out a safety check of the **DrainProTector** to ensure correct installation and not a safety hazard
- Regularly inspect the status and condition of the **DrainProTector** filter
- If hydrocarbons please ensure you are using the Oil, Fuel & Silt **DrainProTector** version

