



Ratchet Strap - 5 Tonnes

Pack Quantity: 12

Our easy to use 5 Tonne Ratchet straps are packed in sets of 12, however are sold individually.

With a 4 tonne rating, these ratchet straps offer excellent strength for securing heavy loads. Complete with a secure ratchet mechanism, industry standard 'J' hooks, and a quick release handle.

PRODUCT FEATURES

- Easy to use ratchet strap
- Rated to 5 Tonnes
- 50mm x 6 metres
- 'J' Hook
- Quick release system
- Not to be used for lifting purposes

SPECIFICATION

Length:	4, 6, 8 metres	Width:	50 mm
Weight Rating:	5 Tonnes		
Hook Type:	J		
Pack QTY:	12		

SIZE OPTIONS

CODE	SIZE	PACK QTY
SE00249	50mm x 4 mtr	12
SE00907	50mm x 6 mtr	12
SE00575	50mm x 8 mtr	12





Ratchet Strap - 5 Tonnes

Product Code: SE00575

Information For Use

1. Selection

When selecting the appropriate RTD product always consider the Lashing Capacity (LC). Take into account the mode of use and the nature of the load to be secured, the size, shape and weight of the load.

Consider the environment and the nature of the load. Take into account any chemical presence and how it will affect the webbing.

2. Use

Ensure you select an RTD which is strong enough and the correct length for the application. Practice fitting and removing the RTD before starting the journey.

3. Fittings

Ensure the anchor points are compatible with the RTD.

4. Stability of load

Ensure the load is stable and independent of the RTD so that it will not fall off the vehicle once the RTD is released. SAFETY to all personnel should always be followed.

5. Operating temperatures

This RTD is suitable for -40°C to +100°C for polyester (PES). These ranges may vary in a chemical environment, in which case source advice from the manufacturer.

Changes in the environment temperature during transport may effect the force in the webbing. The tension force should be checked after entering warm areas.

6. Overloading

Never overload by using mechanical aids such as levers or bars (cheater bars).

7. Limit of twist

Never twist or knot the webbing. Twisting is prohibited.

8. Protection

Protect the webbing against friction, abrasion and damage from loads with edge radius less than twice the webbing material thickness, using protective wear sleeves or corner protectors.

9. Withdrawal and repair

Withdraw the RTD from service immediately upon observing signs of damage such as tears, cuts, nicks and abrasions, or deformation resulting from exposure to heat. Also check End Fittings and the tensioning device for deformations, cracks and pronounced signs of wear and corrosion. Only the manufacturer can carry out any likely repairs on the RTD.



WARNINGS

Care and maintenance of RTD

- Never heat or heat-treat the lashing components.
- Lightly oil the lashing components prior to prolong storage.
- Store the RTD in a clean dry place.
- If contaminated with oil, fuel or acid remove with hot soapy water.
- If contaminated with alkali, rinse thoroughly in cold water ASAP. Do not allow the webbing to dry before rinsing.
- Lightly Lubricate the Ratchet Mechanism if it becomes stiff in use.

Using the RTD

- Ensure the RTD is free of any significant damage or wear.
- Avoid throwing from heights or leaving on the ground.
- Do not twist or knot the webbing.
- Use protective sleeves or other packing material to protect the webbing.
- Ensure the webbing is never overloaded.
- Ensure the force applied does not exceed the manufacturer's recommendations.
- Ensure there is a minimum of 1 1/2 turns of webbing on the ratchet spool.
- Do not allow or carry out modifications or repairs to the RTD.



Ratchet Strap - 5 Tonnes

Product Code: SE00575


Operating Instructions

Step 1. To Insert Webbing




To thread, pull webbing through the slot in the centre rotating spool of the closed ratchet. Remove the slack.

Step 4. To Release

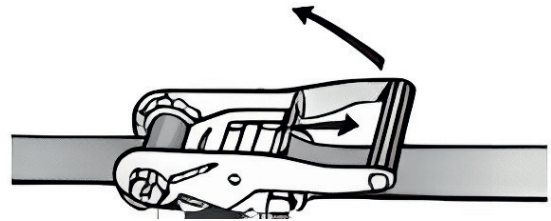

Pull the ratchet handle up to (180°) releasing the failsafe mechanism.

Step 2. To Tension

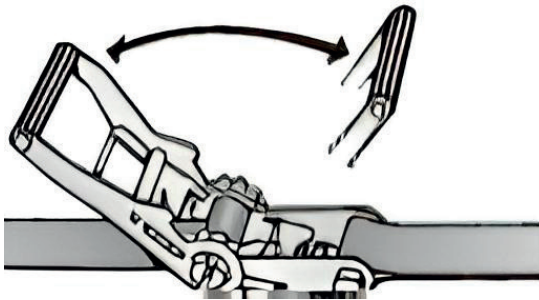

Start ratcheting by raising and lowering the handle (180°). Ensure a minimum of 1 1/2 turns of webbing on the ratchet spool.

Step 5. To Remove Webbing



Pull out all webbing from the spool.



WARNINGS

NOT TO BE USED FOR LIFTING PURPOSES.

Step 3. To Lock



Lower the lock in the handle to the flat position.